


LS-2371
Corps Of Engineers, P-38 Aluminum Finish

<u>Characteristics</u>	<u>Min</u>	<u>Max</u>	<u>Result</u>	<u>Method</u>
Pigment, % by weight	13	---	15.5%	Calculated
Volatile, % by weight	---	45	45.7%	ASTM d2369
Nonvolatile Vehicle, % by wt	42	---	43.7%	Calculated
Viscosity, seconds	35	45	40/4	ASTM d1200
Flash Point	86	---	102F	ASTM d3278
Leafing, %	50	---		Not Tested
Density, lb per Gal	8.0	---	8.13 #/G	ASTM d1475
Dry, set-to-touch, hours	0.5	2.0	1.5 hr (.002)	ASTM d1640
Dry, recoat, hours	---	16	OK	ASTM d1640

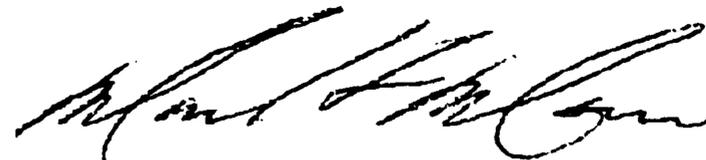

Mark A. Mann
Chemist